

ARK-2150F

Intel® 3rd Generation Core i7-3517UE
Fanless PC with 4 x GbE and isolated digital IO

Preliminary



Features

- Intel® Core™ i7 processors + Intel QM77 PCH
- 1 x DDR3/DDR3L SO-DIMM, support up to 8 GB
- DirectX11, OpenGL3.1, OpenCL1.1, three display interface: VGA + HDMI/ DisplayPort+DVI-D
- Supports Intel AMT8.0
- Supports 4 x Intel GbE
- Support 4ch digital input and 4ch digital output with 2.5KV isolation
- Supports 2 x USB 3.0, 3 x USB 2.0, 4 COMs ports
- Supports 1 x internal mSATA socket and 1 x 2.5" HDD drive bay
- 12-24V wide range DC input with lockable connector
- Supports iManager, SUSIAccess and Embedded Software APIs
- IP40




Specifications


		ARK-2150F-S7A1E
Processor System	CPU	Intel ULV Core i7 3517UE
	Max. Speed	Dual Core 1.7 GHz (Max Turbo Frequency 2.8 GHz)
	L3 Cache	4 MB
	System Chipset	Intel QM77
	BIOS	AMI EFI 64Mbit
Memory	Technology	DDR3 1600MHz, DDR3L 1333 Mhz
	Max. Capacity	8 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Chipset	Intel QM77 Integrated GFX Gen 7
	Graphic Engine	DirectX11, OpenGL 3.1, and Open CL 1.1 Hardware decpde acceleration: AVC/H.264, M PEG-2, VC-1
	VGA	Integrated 340.4MHz RAMDAC, Max resolution up to 2048 x 1536 @ 75Hz
	HDMI/DP	Supports HDMI 1.4 for HD Video playback Max resolution up to 2560 x 1600 @ 60Hz on DisplayPort, Max resolution up to 1920 x 1200 @ 60Hz on HDMI
	DVI-D	Max resolution up to 1920 x 1200
Ethernet	Dual independent display	Yes, VGA+HDMI/DisplayPort, VGA+HDMI/DVI-D, VGA+DVI-D, HDMI/DisplayPort+DVI-D
	LAN1	10/100/1000 Mbps Intel 82579LM Ethernet controller, support Wake On Lan
Audio	LAN2/LAN3/LAN4	10/100/1000 Mbps Intel 82583V Ethernet controller
	Interface	Realtek ALC892, High Definition Audio, Line-out, Mic-in, Line-in
I/O Interface	Serial Ports	4 x RS-232/422/485 port with auto flow control
	USB Interface	3 x USB 3.0 ports and 3 x USB 2.0 ports
Other	Digital I/O	4ch digital input and 4ch digital output with 2.5KV isolation
	Watchdog timer	255 levels timer interval, setup by software
Expansion	Mini PCIe	2 x Full-size Mini PCIe (Supports mSATA & SIM) 1 x Half-size Mini PCIe
	HDD	Supports one drive bay for SATA 2.5" HDD (Compatible with 12.5mm height HDD)
Storage	SSD	Supports one internal mSATA socket
	Microsoft Windows	Windows 7, Windows 7 Embedded, XP Professional, XP Embedded
Software Support	Linux	Ubuntu 12.04
	Power Type	AT/ATX
Power Requirement	Power Input Votage	12 ~ 24 V _{DC}
	Minimum Power Input	12 V ~ 24 V, 4.0 A ~ 2 A
	Power Adapter	AC to DC, DC 19V/3.42A 65W (Optional)
Power Consumption	Typical	22 Watt
	Max.	27 Watt
Mechanical	Construction	Aluminum housing
	Mounting	Din-Rail mounting, Desk/wall-mounting, VESA mounting
	Dimensions (W x H x D)	264.5 x 75.1 x 133.0 mm (10.41" x 2.96" x 5.24")
	Weight	2.8kg (6.17lb)
Environment	Operating Temperature	With extended temperature peripherals: -20 ~ 60° C (-4 ~ 140° F) with 0.7m/s air flow With 2.5-inch hard disk 0 ~ 45° C (32 ~ 112° F) with 0.7m/s air flow
	Storage Temperature	-40 ~ 85° C (-40 ~ 185° F)
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With SSD: 5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis.
	Shock During Operation	With SSD: 50 G, IEC 60068-2-27, half sine, 11 ms duration
	EMC	CE/FCC Class A, CCC, BSMI
	Safety Certifications	UL, CCC, BSMI

Dimensions


Unit: mm (inch)

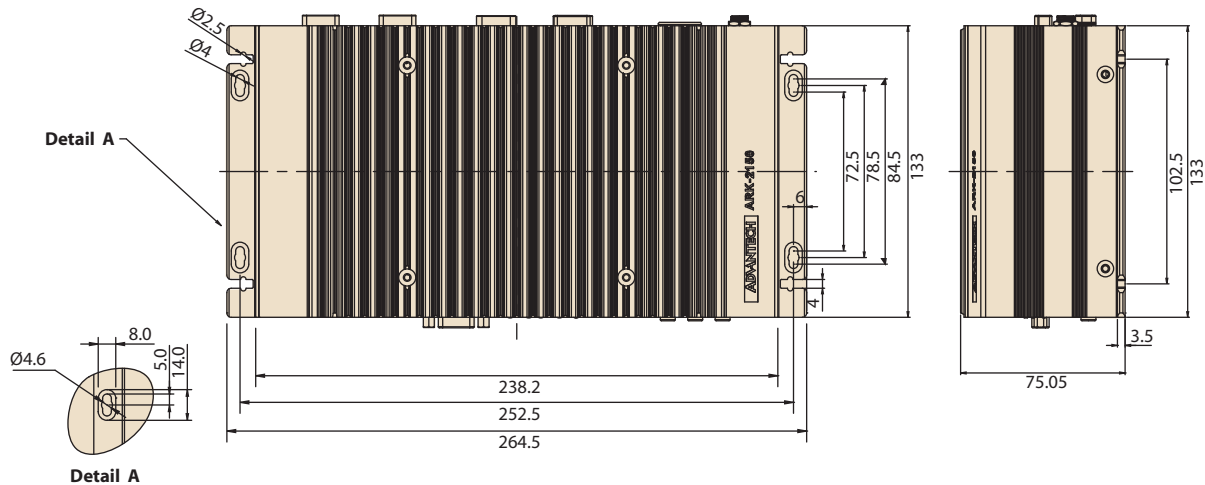

Front Panel External I/O Mechanical Layout/Drawing

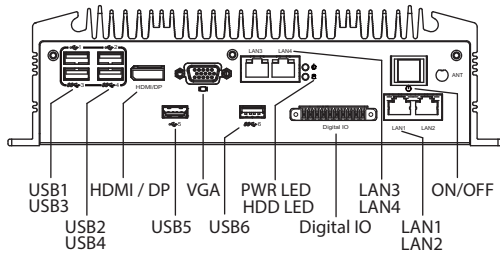

Rear Panel External I/O Mechanical Layout/Drawing

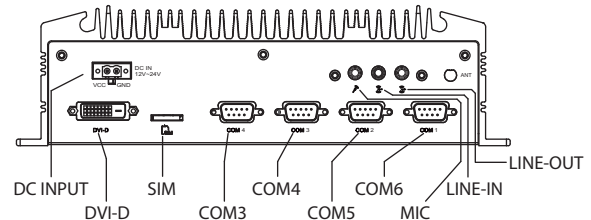

Ordering Information

Part No.	CPU	VGA	HDMI/DP	DVI-D	GbE	USB 3.0	USB 2.0	RS-232/422/485	DIO	Audio	Half-size Mini PCIe	Full-size Mini PCIe*	SIM	2.5" SATAII HDD Space	Power Input	Operation Temp.
ARK-2150F-S7A1E	Intel Core i7 ULV 1.7GHz 3517UE DC, 17W	Yes	Yes	Yes	4	3	3	4	4ch DI and 4ch DO with 2.5KV isolation	Line-out, Line-in, MIC	1	2	1 x external	1	12-24V	-20 ~ 60° C

* Full-size Mini PCIe supports mSATA

Packing List

Part Number	Description
-	1 x ARK-2150 Unit
-	1 x Utility CD
-	1 x User Manual (Simplified Chinese)
-	1 x China RoHS
1700009001	1 x 2-pin Phoenix to DC-Jack power cable

Embedded OS

Part Number	Description
2070011831	Image WES7E SP1 x32 ENG/JP/TC/SC
2070011830	Image WES2009 V4.2 multi 24 language

Optional Items

Part Number	Description
1757003659	AC-to-DC Adapter, DC19 V/3.42 A 65 W, with Phoenix Power Plug, 0 ~ 40° C for Home and Office Use
1700001947	Power cable 2-pin 180 cm, USA type
1700001948	Power cable 2-pin 180 cm, Europe type
1700001949	Power cable 2-pin 180 cm, UK type
1700002141	Power cable 2-pin 180 cm, PSE type
1960025333N011	VESA mounting bracket
9666K10000E	DIN-rail mounting kit
AMO-WIFI06E	WiFi 802.11 b/g/n mini PCIe module (w/antenna)
EWM-C106FT01E	7.2 Mbps HSUPA, WCDMA module, w/o voice function
1750006009	Internal Coaxial Cable 25cm for EWM-C106FT01E
1750005865	GSM/GPRS dipole antenna for EWM-C106FT01E