


ASMB-622V3

LGA4677 4th Gen Intel® Xeon® Scalable Proprietary Board with 16 DDR5, 2 PCIe x16, 4 PCIe x8, 5 SATA3, 4 USB3.0, IPMI

NEW

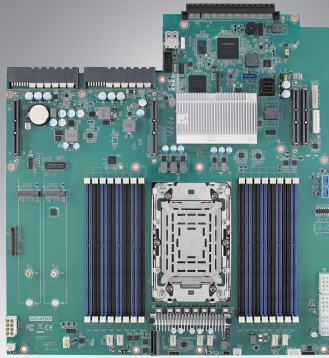

Features

- Proprietary server board with 4th Gen. Xeon® Scalable processor
- DDR5 4400 MHz RDIMM up to 4TB (16 DIMMs) supports Intel® Optane™ Persistent Memory
- 1 SFF-8643 connector support 4 ports SATA drive, 2 M.2 2280/22110 on board
- 1 MCIO connector support 2 ports NVMe drive in option
- Two PCIe Gen5 x16 (or four PCIe x8 switchable) supporting 2 double deck cards with active fan
- Four PCIe Gen5 x8
- Quad LAN with Intel I350
- Flexible IO board design

CE FCC

Specifications

Form Factor		Proprietary 326 x 343 mm (12.83" x 13.5")	
Processor System	Socket	Intel LGA4677	
	CPU type	Intel 4th Generation Xeon Scalable processors (CPU cooler should be purchased separately and TDP up to 225W)	
Core Logic	Chipset	Intel C741 chipset	
Memory	Total slots	16 (2 DIMM per channel)	
	Capacity	Maximum 4TB ECC RDIMM	
	Memory type	DDR5 ECC-REG 3200/3600/4000/4400/4800 MHz RDIMM Speed up to 4400 MHz (2DPC)	
	Memory size	16GB, 32GB, 64GB, 128GB, 256GB	
Expansion Slots	Total PCIe slots	8	
	Lower Right Riser Card Cage-Slot 1	FH/10.5L PCIe x16 slot (x16 or x8 link)	
	Lower Right Riser Card Cage-Slot 2	FH/10.5L PCIe x8 slot (no link or x8 link)	
	Upper Right Riser Card Cage-Slot 3	FH/10.5L PCIe x16 slot (x16 or x8 link)	
	Upper Right Riser Card Cage-Slot 4	FH/10.5L PCIe x8 slot (no link or x8 link)	
	Middle Riser Card Cage-Slot 5	FH/HL PCIe x8 slot	
	Middle Riser Card Cage-Slot 6	FH/HL PCIe x8 slot	
	Left Riser Card Cage-Slot 7	FH/HL PCIe x8 slot	
Graphics	VGA	Aspeed AST2600	
Storage	SATA controller	Intel® C741: 4 x SATA3.0 (6 Gb/s) via Mini SAS HD (SFF-8643), support software RAID 0,1,5,10 1 x SATA3.0 (6Gb/s)	
	NVMe controller	2 x NVMe support VROC (optional)	
Networking	1Gbps 100Mbps	4 x Intel I350	
Onboard I/O Connector	PSU connector	Power card edge connector, 2 x 8 pin and 2 x 4 pin power connector	
	USB connector	2 x USB3.0 ports (type A) + 2 x USB3.0 ports (onboard header)	
	Fan header	9 (2 for CPU fan + 6 for system 8cm fan + 1 for system 6cm fan)	
	M.2	2 x M.2 2280/22110 B+M key (SATA/PCIe)	
	SMBus	1	
	Chassis intruder	1	
	Front LAN LED	1	
	Audio Header	-	
Rear I/O Connector	PS/2 Keyboard/Mouse header	-	
	Serial port header	1	
	External serial port	1	
	External USB port	2 (USB3.0)	
	VGA port	1	
	RJ-45	5 (1 port dedicated BMC)	
	PS/2 Keyboard/Mouse	-	
Management Solution	Infiniband	-	
	Software	-	
Monitoring	Out of band remote management	Yes	
	CPU temperature	Yes	
Watchdog Timer	System Monitoring	Yes	
	Output	System reset	
Environment	Interval	Programmable 1 ~ 255 sec/min	
	Temperature	Operating 0 ~ 40 °C, depends on CPU speed and cooler solution	Non-operating -40 ~ 85 °C
	Humidity	10% ~ 95%	10% ~ 95% (Non condensing)
Physical Characteristics	Dimension (L x H)	326 x 343 mm (12.83" x 13.5")	

