

# EI-52

## Edge Intelligence System with Intel 11th generation with Edge X API and WISE-DeviceOn

Preliminary




### Features

- Intel 11th gen. Core i5/i3/Celeron
- Pre-installed Edge X with data acquisition API
- Pre-installed WISE-DeviceOn for device management and remote control
- 8/16 GB DDR4 Memory Built-in
- 64 GB SATA Slim SSD Built-in
- 4K HDMI and DP 1.4a Dual Display
- Compatible with optional VEGA-330 AI Module supported by Intel Movidius Myriad X VPU
- Compatible with optional AIW-355 5G module
- Intel VNNI support for AI and deep learning

WISE-DeviceOn  WISE-Marketplace

### Introduction

Advantech EI-52 is a compact box designed high performance Edge Intelligence system. It is powered by Intel® 11th gen. Core i5/i3/Celeron Processor, with software Edge X API for data acquisition and WISE-DeviceOn for device management and remote control. EI-52 is the ideal ready-to-use edge intelligence solution that generates values from data, device to resource.



### Edge-X

### WISE-DeviceOn

#### Intel 11th Core i5/i3/Celeron Processor

- High Performance and Power Efficiency
- Outstanding 12 Gen. GFX Graphic Performance

#### Edge X API Built-in Built-in

- Expendable Data Acquisition API
- Easy for 2nd Development

#### WISE-DeviceOn Built-in

- Device Management and Remote control
- Acronis and Macfee for system backup and security


### Specifications

		EI-52		
Processor System	CPU	Core i5-1145G7E	Core i3-1115G4E	Celeron 6305E
	System Chipset	Integrated in CPU		
Memory	Technology	Dual Channel DDR4 3200 MHz 260 pin SO DIMM		
	Built-in	Core i5 SKU: 1x 16 GB 260-pin SO-DIMM DDR4 2400 MHz memory (-20 ~ 85 °C) built-in Core i3 & Celeron SKU: 1x 8 GB 260-pin SO-DIMM DDR4 2666 MHz memory (-20 ~ 85 °C) built-in		
Graphics	Chipset	Intel 12th gen. Graphics		
	Graphic Engine	Direct X 12.1, OpenGL 4.6 HW Encode: H.265/HEVC, H.264/AVC, VP9, SCC HW Decode: H.265/HEVC, H.264/AVC, VP9, SCC		
	HDMI	1 x HDMI 2.0b		
	DP	1 x DP 1.4a		
Storage	Dual Display	HDMI + DP		
	SSD	1 x 64 GB SATA Slim SSD (-40 ~ 85 °C) built-in		
I/O Interface	LAN	2		
	USB 2.0/USB 3.0	2/4		
	Audio	1 x Mic-in, Line-out, Realtek ALC888S HD Audio		
	Serial	2 x RS-232/422/485		
Expansion	Mini PCIe	1 x Full-size Mini PCIe #1		
	M.2	1 x 2280 M key #1		
Trusted Platform Module	TPM 2.0	SLB9670XQ2.0		
Power Requirement	Power Input Voltage	19 V <sub>dc</sub>		
	Power Type	ATX/AT, default ATX		
Physical Characteristics	Mounting	Wall Mount		
	Dimensions (W x H x D)	156 x 112 x 60 mm		
	Weight	0.94 Kg		
Environment	Operating Temperature	-10 ~ 50 °C, with 0.7m/s air flow		
	Microsoft Windows	Windows 10 IoT 64-bit		
Software Support	Linux	By project		
	Others	Advantech Edge X pre-installed in Win10 image WISE-DeviceOn pre-installed in Win10 image		
	EMC	CE/FCC Class B, CCC, BSMI		
Certification	Safety	UL, CB, CCC, BSMI		


#1 Mini PCIe and M.2 slots are hardware interfaces for wireless communication integration only. System level RF certification is not available.

## Dimensions


Unit: mm [inch]

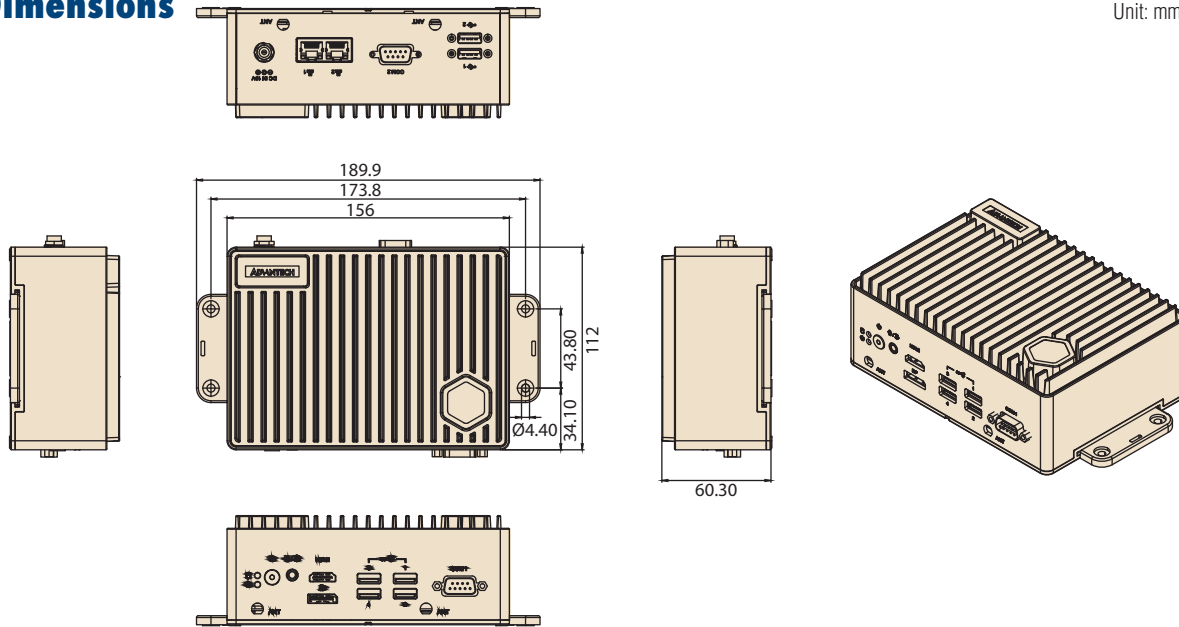

## Front View

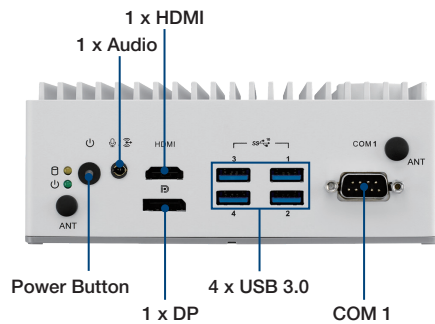

## Rear View

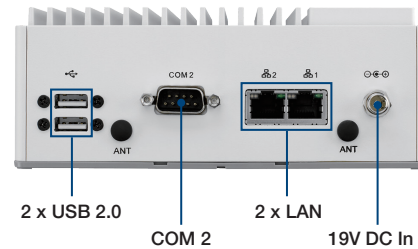

## Ordering Information

Part No.	CPU	Memory	Storage	Display	LAN	USB	RS-232/422/485	M.2	Mini PCIe	Power Input	Operating Temp.
EI-52-S6A1	Intel Core i5-1145G7E	16GB DDR4 Built-in									
EI-52-S2A1	Intel Core i3-1115G4E	8GB DDR4 Built-in	64GB SATA Slim SSD Built-in	1 x DP 1 x HDMI	2	4 x 3.0 2 x 2.0	2	1 x 2280 M key	1 x Full-size Mini PCIe	19 V <sub>DC</sub>	-10 ~ 50 °C
EI-52-U0A1	Intel Celeron 6305E	8GB DDR4 Built-in									

## Packing List

Part Number	Description
-	1 x EI-52 unit
-	1 x Power adapter (DC 19V, 90W)
-	1 x User manual (Simplified Chinese)
-	Edge X Package
-	WISE-DeviceOn Package

## Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180cm, USA type
170203183C	Power Cable 3-pin 180cm, Europe type
170203180A	Power Cable 3-pin 180cm, UK type
1700008921	Power Cable 3-pin PSE Mark 183cm
AMK-A0038	VEGA-330 Kit for EI-52
AMK-A0039	AIW-355 5G module Kit for EI-52
AMK-A0040	VESA and DIN-Rail Mounting kit for EI-52